

Manufactured with  
**hitec**nology



## SG15BL

Engineered and Manufactured in South Korea


## 1 Performance Specification

<b>Model</b>	SG15BL-CAN
<b>Control System</b>	CAN 2.0A,B / DroneCAN (UAVCAN v0)
<b>Position Type</b>	Contactless Magnetic Encoder
<b>Motor Type</b>	BLDC Motor
<b>Operating Voltage Range</b>	9.0V ~ 15.0V
<b>Voltage</b>	At 12.0V
<b>No Load Speed</b>	487.8 °/sec
	0.123 sec/60°
	81.3 RPM
<b>Rated Torque (At 20% Load)</b>	0.216 N·m (2.2 kgf·cm)
<b>Peak Torque</b>	1.08 N·m (11.0 kgf·cm)
<b>Idle Current (At Stopped)</b>	35mA
<b>Running Current (At No Load)</b>	200mA
<b>Peak Current</b>	2,000mA
<b>Operating Travel</b>	Servo Mode : ±60°(Default), ±150°(Programmable)
<b>Multi-Turn</b>	Turn Mode : ±32760 turns (DroneCAN: n/a)
<b>Continuous Mode</b>	N/A
<b>Temperature Sensing</b>	Enabled (MCU, Motor)
<b>Voltage Sensing</b>	Enabled
<b>Current Sensing</b>	Enabled
<b>Humidity Sensing</b>	Enabled
<b>Servo Amplifier Type</b>	32bit Programmable Digital

## 2 Mechanical Features

<b>Connector Type</b>	Circular
<b>Dimensions</b>	31.0 x 15.0 x 50.0mm (±0.2mm) / (1.220 x 0.590 x 1.969 inch)
<b>Weight</b>	62.5g (±10%)
<b>Housing</b>	Rugged Aluminum Alloy With Hardcoat Anodizing (MIL-A-8625 Type III)
<b>Gear Reduction</b>	5 Hardened Steel Gears
<b>Bearing</b>	8 Ball Bearing & 3 Needle Bearing & 1Thrust Bearing
<b>Horn Gear Spline</b>	Square 5.0 x 5.0
<b>Gear Train Backlash</b>	< 0.5°
<b>Slip Clutch Release Momentum</b>	N/A
<b>Radial Load On Output Shaft</b>	< 129.55N (13.21kgf)
<b>Push Load On Output Shaft</b>	< 1,025N (104.52kgf)


### 3 Connector
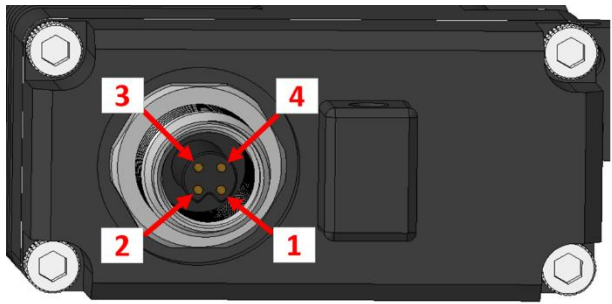
<b>Connector Type</b>	Circular		
<b>Manufacturer</b>	Shenzhen Signal Electronics Co., Ltd		
<b>Connector</b>	M5 4 Pins Female Panel Mount (M5*0.75 Front Fastened DIP) / 050004-04-007		
<b>Wire</b>	N/A		
<b>Mating</b>	M5 4 Pins Male Assembly Connector, etc.		
<b>Pin Assignment</b>		1.	Can-High
		2.	Can-Low
		3.	Vcc
		4.	Gnd
		-	-

### 4 Environmental Specifications


<b>Operation Temperature</b>	-30°C (-22°F)	MIL-STD-810G Method 502.5
	+70°C (+158°F)	MIL-STD-810G Method 501.5
<b>Storage Temperature</b>	-40°C (-40°F)	MIL-STD-810G Method 502.5
	+80°C (+176°F)	MIL-STD-810G Method 501.5
<b>Humidity</b>	95% @35°C ~ 60°C @300hours	MIL-STD-810G Method 507.5
<b>IP-Rating</b>	IP68	IEC 60529
<b>Vibration</b>	Orthogonal axes : ±X , ±Y, ±Z from 50 ~ 500Hz Duration : sweep 5min Acceleration 30G Displacement : 5mm	MIL-STD-810G 514.6C-VII EN 60068-2-6
<b>Mechanical Shock</b>	Procedure 1 - Functional shock 20g, 11ms, Sawtooth Waveform	MIL-STD-810G 516.6
<b>EMC</b>	EN 61000-4-2 EN 61000-4-3 EN 55016-2-1 EN 55016-2-3	EN 61000-6-2:2005+Cor.:2005 EN 61000-6-3:2007+A1:2011
<b>MTTF</b>	>1,000h	Test Condition Load : 20% of Max Torque 0.5Hz sweep(±60)

### 5 Dimensions

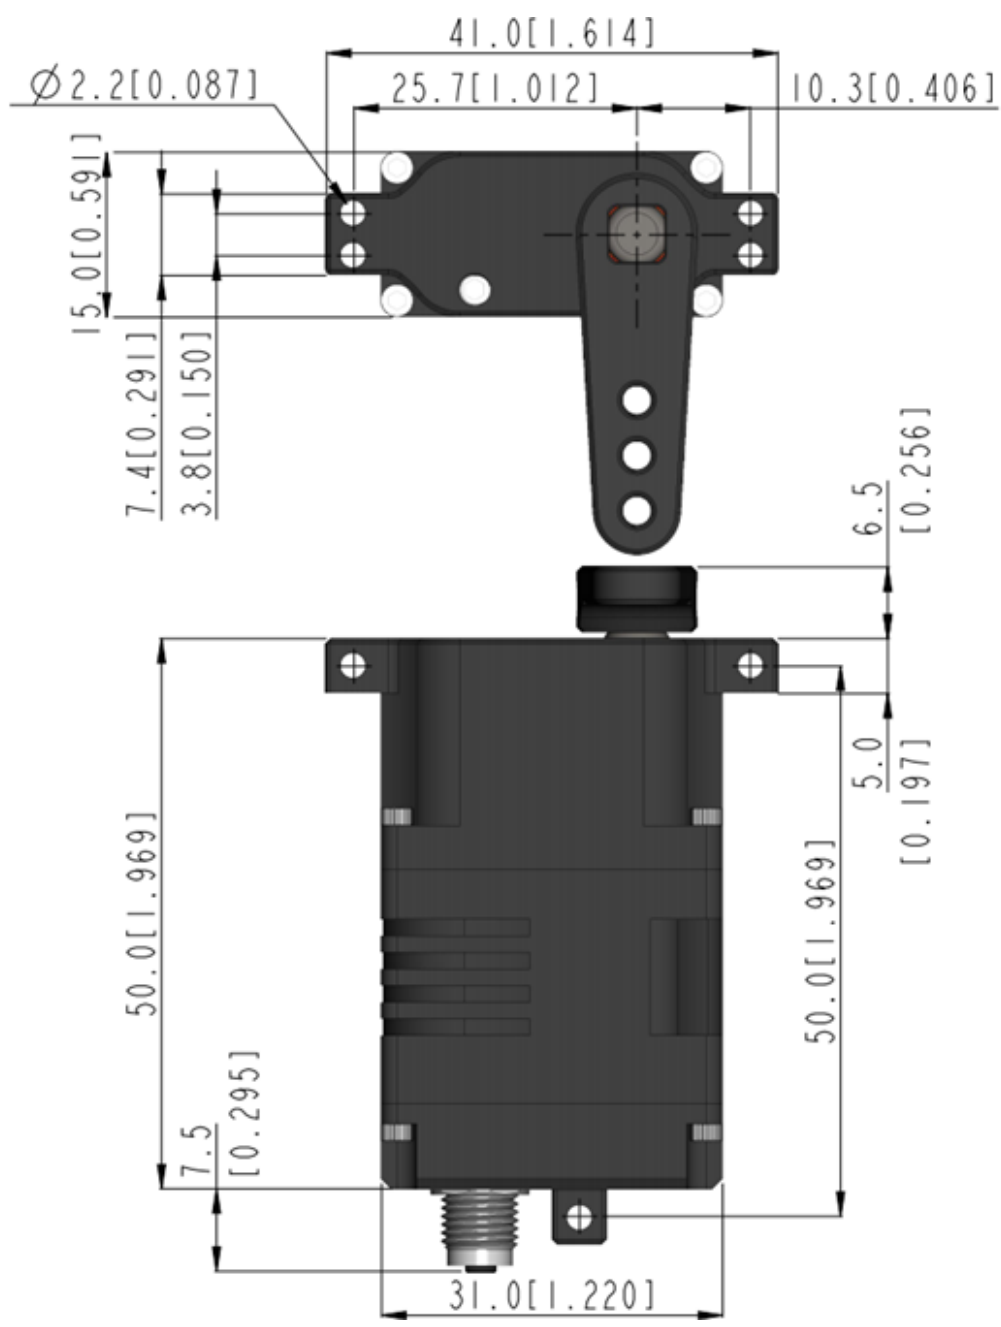


unit : mm [inch]

### 6 Dimensions– With Tray

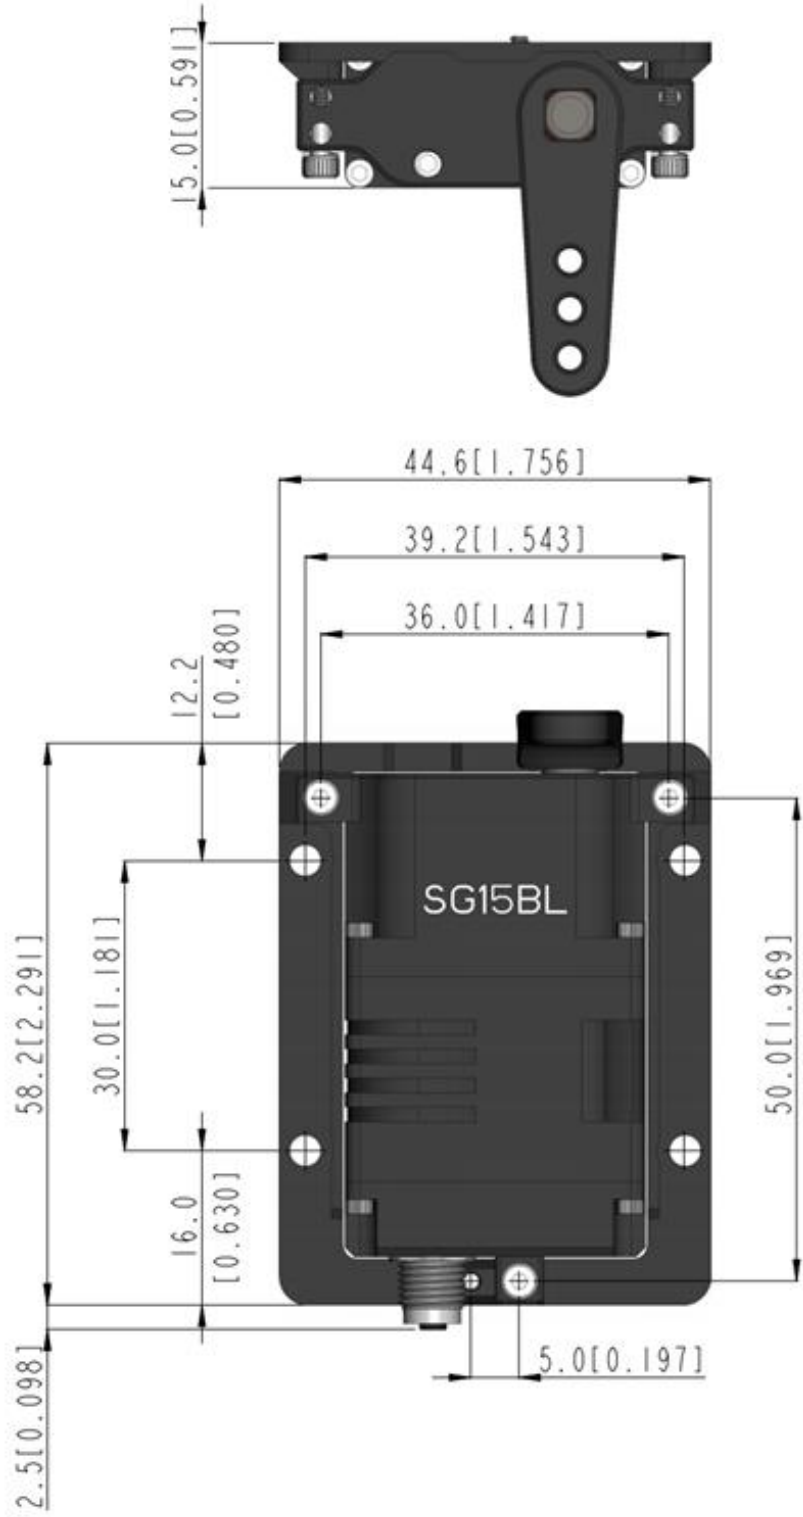

unit : mm [inch]


### 7 Dimensions – Accessory

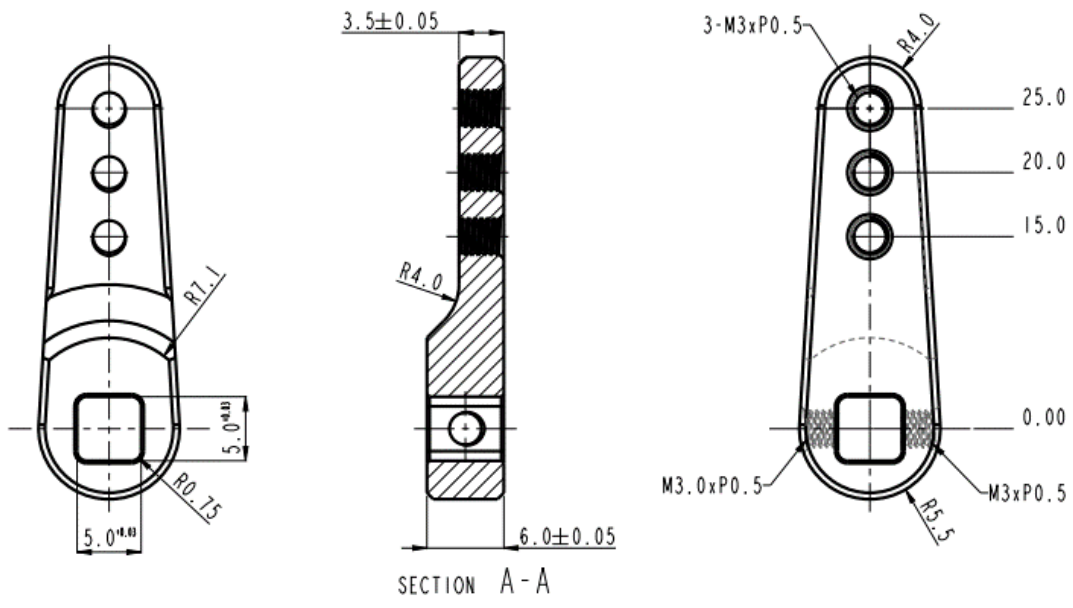

unit : mm

# 8 Performance Graph

Ver 2.0

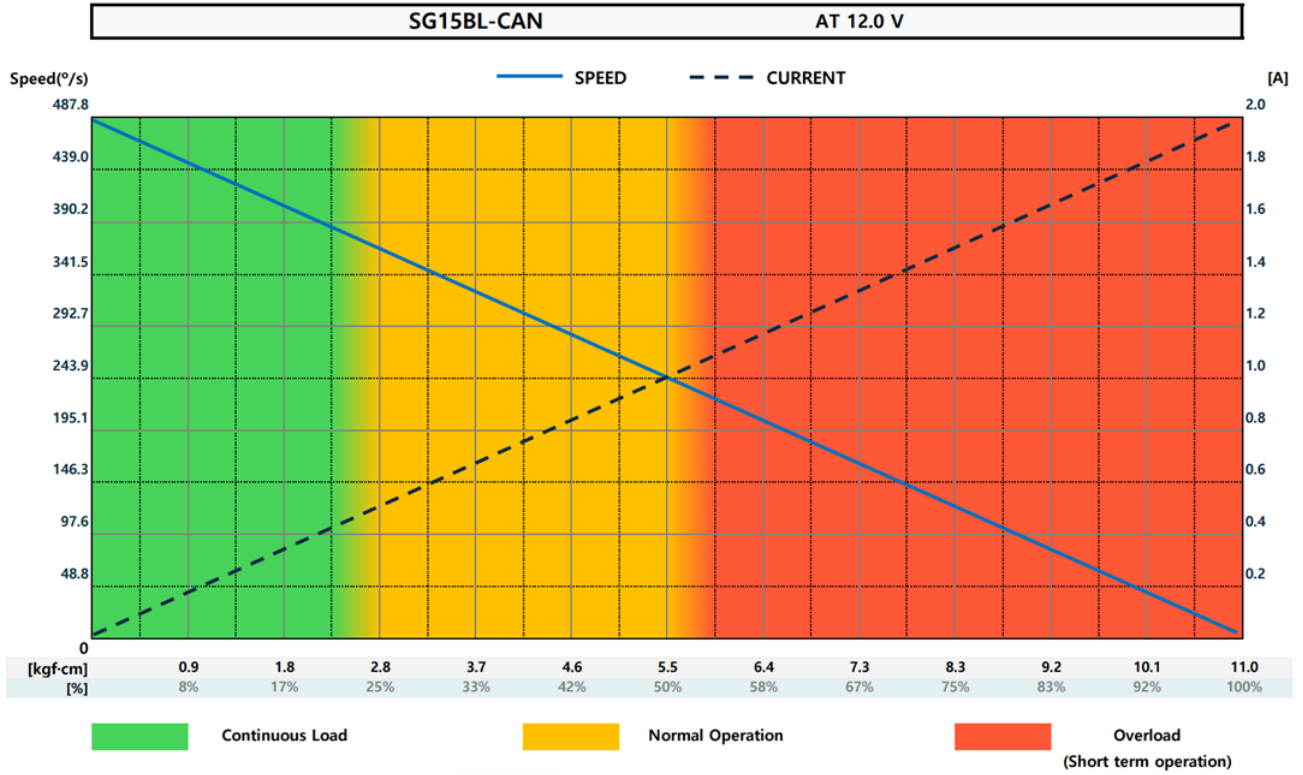

## 9 Changes

Data	Version	Updates
2023-01	2.00	-
2023-02	2.01	Fix wording and image errors
2023-11	2.02	Modify the 'Radial Load On Output Shaft' value. Add information about anodizing to Housing. Fix document formatting errors.
2023-12	2.03	Modify product images and drawings.
2024-01	2.04	Add text regarding References. Fix 'Radial Load On Output Shaft' error value. Fix weight error value.
2024-01	2.05	Fix the connector pin map image.
2025-01	2.06	Changed the phrase 'Able' to 'Enabled' and fixed a typo.
2025-03	2.07	Change the performance graph format.

## REFERENCES

- ✓ For the protocol manuals of CAN, DroneCAN, RS485 and TTL, please contact Hitec RCD Korea.  
( [industrial.sales@hitecrd.net](mailto:industrial.sales@hitecrd.net) )
- ✓ If you would like to purchase additional industrial servos, please contact Hitec Network or local Hitec distributors in your place.  
( <https://hitecrd.com/contact-us/international-distributors> )
- ✓ This product should not be used directly on the human body for medical purposes.
- ✓ This product should not be used for war weapons.
- ✓ All specifications are subject to change without notice.
- ✓ Be careful as strong magnetic fields may cause malfunction of the product.

